

# MULTIPOND

## 3800 series



MULTIPOND 3800 series multihead weigher,  
can be equipped with metal or plastic hoppers



### Facts

- Up to 200 weighings per minute in combination mode
- Up to 240 weighings per minute in dosing mode
- Portion weights for individual dump: up to 5.000g
- Higher weights in large portion or multiple dump mode are possible
- Maximum accuracy
- Fully automatic calibration and taring
- Product-specific equipment
- Dust and water-repellent design
- Combining, mixing, counting and dosing applications

# PRODUCTION PROVEN BENEFITS

## reliable + accurate ...

Maximum accuracy and up time are guaranteed by high resolution, temperature compensated weigh cells with integrated calibration weights from our own manufacture. These are automatically calibrated at pre-programmed intervals during operation.

... less giveaway

## flexible operating system ...

A windows-based operating system and standardized interfaces enable easy integration into the production process.

... seamless integration into the production process

## custom-made + user-friendly + versatile ...

All product contact parts are available in a number of materials such as profiled or smooth plastic or metal to handle different product types. These are interchangeable and can be removed quickly and easily without tools for cleaning, changing products and maintenance. Control and operation of the weigher is via a user-friendly touch screen HMI (Human Machine Interface).

... less down time

## special weigh hopper design ...


The double opening hopper flaps 'bomb door' are designed for fast and clean discharge which is particularly good for depositing difficult and sticky products.

... higher output

## automatic feed control ...

The 'intelligent' automatic feed control eliminates the need for adjustment by an operator for product condition change. Each radial feeder is automatically optimized to achieve the highest weighing efficiency based on product flow conditions.

... no operator intervention

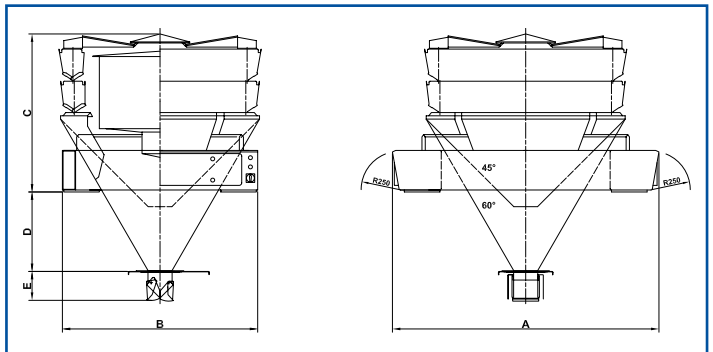

## Technical Data

Type	Number of weigh hoppers	Max. theoretical weighings per minute* (depending on product and target weight)
MP 10-3800/1250-H	10	75
MP 10-3800/2500-H		
MP 14-3800/1250-H	14	120
MP 14-3800/2500-H		
MP 16-3800/1250-H	16	140
MP 16-3800/2500-H		
MP 20-3800/1250-H	20	160
MP 20-3800/2500-H		
MP 24-3800/1250-H	24	200
MP 24-3800/2500-H		

\* in combination mode

Subject to change.

## Machine Dimensions

MACHINE DIMENSIONS (dimensions for 15° distribution cones and 3l timing hoppers)					
A	B	C	D for 45°	D for 60°	E
1320	1860	1150	48	480	230
1610	2150	1100	203	601	230
1780	2320	1100	290	868	230
2100	2640	1166	400	1066	230
2300	2840	1205	540	1312	230

Subject to change.

### MULTIPOND headquarters and manufacturing facilities:

#### MULTIPOND Wägetechnik GmbH

Traunreuter Straße 2-4 ■ 84478 Waldkraiburg ■ Germany ■ Tel.: +49 (0) 86 38 - 961 - 0 ■ Fax: +49 (0) 86 38 - 961 - 111 ■ info@multipond.com

### MULTIPOND sales and service:

#### MULTIPOND s.a.r.l.

Parc d'Activité de la Maison Neuve  
44360 Vigneux de Bretagne  
France  
Tel.: +33 - 2 40 57 30 10  
Fax: +33 - 2 40 57 30 17  
info@multipond.fr

#### MULTIPOND Benelux B.V.

Boven Zijde 10  
5626 EB Eindhoven  
The Netherlands  
Tel.: +31 - 40 - 26 28 090  
Fax: +31 - 40 - 26 28 099  
info@multipond.nl

#### MULTIPOND America Inc.

225 Packerland Drive  
Green Bay, WI 54303  
United States of America  
Tel.: +1 - 920 - 490-8249  
Fax: +1 - 920 - 490-8482  
sales-us@multipond.com

#### MULTIPOND Ltd.

20, St. Johns Road  
Tylers Green, Penn  
Buckinghamshire HP10 8HW  
United Kingdom  
Tel.: +44 - 1494 - 81 66 44  
Fax: +44 - 1494 - 81 62 06  
info@multipond.co.uk